

Easy & Handy



Camera Zoom & OSD Controller SCC-101 User's Manual

Thank you for purchasing a SAMSUNG Camera Zoom&OSD Controller.
Before attempting to connect or operate this product,
please read these instructions carefully and save this manual for future use.

ENGLISH

Camera ZOOM&OSD control does possibility conveniently by SCC-101
Available Model : 1) BOX type ZOOM CAMERA(ex: SDZ-300/330, etc)
2) IR CAMERA(ex: SIR-4150/4250, etc)
3) Dome camera that RS485 communication is available
(ex: SID-500, SVD-4300. etc)



Samsung Techwin cares for the environment at all product manufacturing stages to preserve the environment, and is taking a number of steps to provide customers with more environment-friendly products. The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Components and Accessories



① SCC-101




② SCC-101 Zender



③ User's Manual

Overview




NAME	FUNCTION DESCRIPTION
POWER(Lamp)	Lamp ON: Stand-by
W	Moves the ZOOM(OPTICAL & DIGITAL) lens in the direction of WIDE.
T	Moves the ZOOM(OPTICAL & DIGITAL) lens in the direction of TELE.
FAR	Moves the FOCUS lens in the direction of FAR.
NEAR	Moves the FOCUS lens in the direction of NEAR.
MIRROR	Flips the content of the screen from left to right.
FREEZE	Freezes the content of the screen.
AF	Runs Auto Focus.
SET (■)	- Pushing the button enter the SETUP MENU of camera - In case of being sub menu, enters into sub menu.
UP (▲)	Moves the CURSOR up in the Menu.
DOWN (▼)	Moves the CURSOR down in the Menu.
LEFT (◀)	Moves the each setting CURSOR left in the MENU.
RIGHT (▶)	Moves the each setting CURSOR right in the MENU.

Notes


- If ZOOM CAMERA isn't, only OSD control is available.

Connection

1) Box type ZOOM Camera: Direct connection

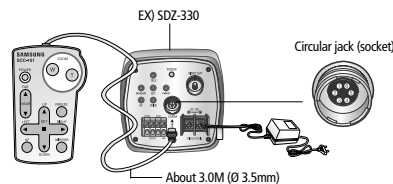

2) IR Camera & Dome camera that RS485 communication is available : Use SCC-101 Zender

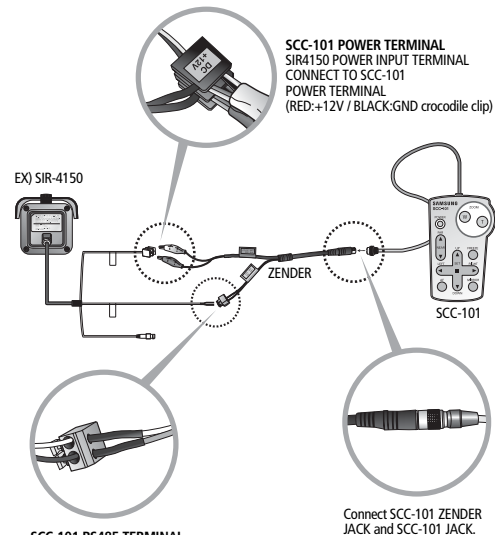

CAMERA Communication Settings

MODEL	IR-CAMERA	BOX TYPE ZOOM CAMERA & Dome camera that RS485 communication is available
Description	Use does possibility immediately in Factory default mode.	Use does possibility after change COMMUNICATION settings of the Factory default mode.
MODE	SERIAL	SERIAL
DATA BIT	8BIT	8BIT
BIT/sec	9600bps	9600bps
PARITY	NONE/EVEN	EVEN
CAM ID NO	1~255 is available	0
Return Packet	-	ENABLE

SCC-101 SPECIFICATION

MODEL	SCC-101
Power Consumption	About 0.5W (DC 12V, About 40mA)
Communication	RS-485
Dimensions	52.5(W) x 81.0(H) x 8.5(D)mm
Cable Length	About 3M
Weight	About 130g
Operational temperature	0°C ~ 50°C
Warrenty period	One year from purchase date

SALES NETWORK

* SAMSUNG TECHWIN CO., LTD.

145-3, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-120, Korea
TEL : +82-31-740-8151-8158 FAX : +82-31-740-8145

* SAMSUNG OPTO-ELECTRONICS UK, LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park Chertsey, Surrey KT16 0PS
TEL : +44-1932-45-5308 FAX : +44-1932-45-5325

www.samsungtechwin.com
www.samsungcctv.com

P/No. : Z6806-0104-01A
VAN 08. 01